

FIBER MULTIPLEXER

4 Voice (FXS/FXO) POTS fiber multiplexer



Voice Fiber Mux Series

ST-2204-FA

Overview

This equipment uses design of ultra large scale integrated circuit, and its outward appearance is succinct. The merits include easy installation and debugging, unnecessary for maintenance and steady performance. It is suitable in business for communication operator, government and kinds of entities.

ST-2204-FA fiber mux can provide 1-4 channels, telephone through optical cable, the network application is point-to-point, supporting FXO/FXS. It has solved telephone transmission problem of edge customers. This equipment uses special digital multiple-connected chip whose function is formidable, and it integrates nearly all the digital logical function of equipment, thus remarkably enhancing product performance and reducing cost.

Additional channels of 10/100 Ethernet can be implemented

4 channels of FXS/FXO are connected at same RJ-45 port, so all 8 pins of RJ-45 connector are used, and additional cable of RJ-45 ----> 4 x RJ-11 should be used in case the connections are made directly to phone sets, but if RJ-11 cable are patched to LSA+ or other distribution panels, then it's not necessary.

Features


- * Low cost solution for delivering analogue POTS lines over long distance fibers;
- * Up to 4 FXO ports for connection to PABX or PSTN;
- * Up to 4 FXS ports for connection of phones or faxes;
- * Ethernet port for LAN interconnection;
- * MTBF more than 10 years
- * WDM Bidi fiber interfaces available
- * 4 voice channels are connected at same RJ-45, all 8 pins therefore are used

4 Voice (FXS/FXO) POTS fiber multiplexer

Specifications

FXS	ringing voltage: 75V ringing frequency: 25HZ
FXO	Two line input impedance: 600 Omega (hanging off) wastage: 40 db ringing detecting voltage: 35V
Optical interface parameter:	optical wavelength: 850nm/1310nm for multi-mode optical interface, 1310nm/1550nm for single-mode optical interface optical interface: SC/FC receiving and dispatching module: >-6dBm optical receiver receiving sensitivity <-36 (BER<10): dynamic receiving range: >-30dB transmitting range: Multi-mode 2 Km, single-mode 40Km, single-mode 60 Km, single-mode 120Km, WDM bidi available vibration characteristic: Comforms G.742 and G.832 standard

Applications:

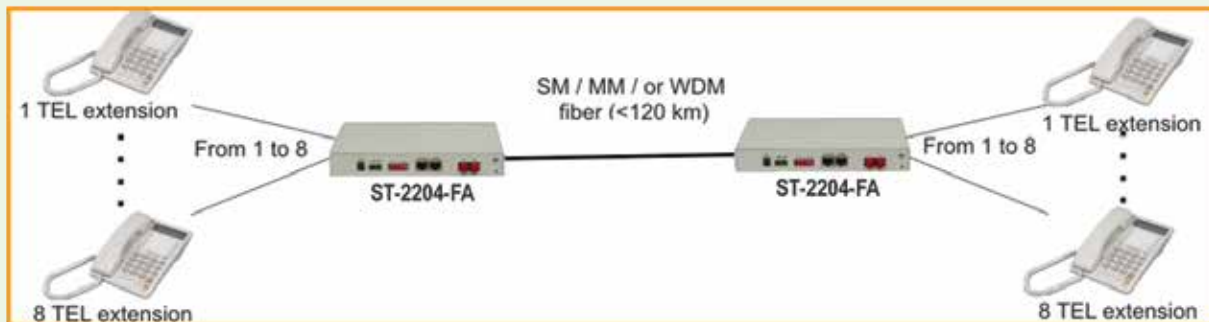

Ordering Information

Product	Descriptions
2204-FA	4 channels voice on fiber, SC/FC connector, FP1310nm, single fiber 20km, voice interface supports FXO or FXS, AC110/220V or DC-48V;
2204-FA/4E1/ETH	4 channels voice on fiber, SC/FC connector, FP1310nm, single fiber 20km, voice interface supports FXO or FXS, Ethernet port(10/100 M adapt), AC110/220V or DC-48V;

* All Right reserved to Spiktel

* Specs and Pictures of the product can be revised according to R&D

* Products design in UK.

www.spiktel.co.uk

www.spiktel.com

Enquiry: sales@spiktel.com

Corporate Office

UK

SPIKTEL TECHNOLOGIES LLC.
179B Norwood Road Southall Middlesex UK UB2 4JD
Tel:+44-0208-8432233, Fax: +44-0208-5742244

Branches

HongKong

SPIKTEL INTERNATIONAL CO. LTD.
801, 8/F, Opulent Bldg.,
402-406 Hennessy Rd., Wanchai, Hong Kong
Tel: +852- 2893 8228 Fax: +852- 2893 1822

India

SPIKTEL TECHNOLOGIES PVT. LTD.
F-23, Roshanara Complex, Roshanara Road,
Delhi-110007 Tel:- +91-11-23824050, 64704050

Dubai

SPIKTEL TECHNOLOGIES MEA
New Al Kuwaitat, Street 8, Villa 2B, AL AIN , UAE
P.O. Box. 13787, Tel/Fax: +9713-03-7377053